


客户确认

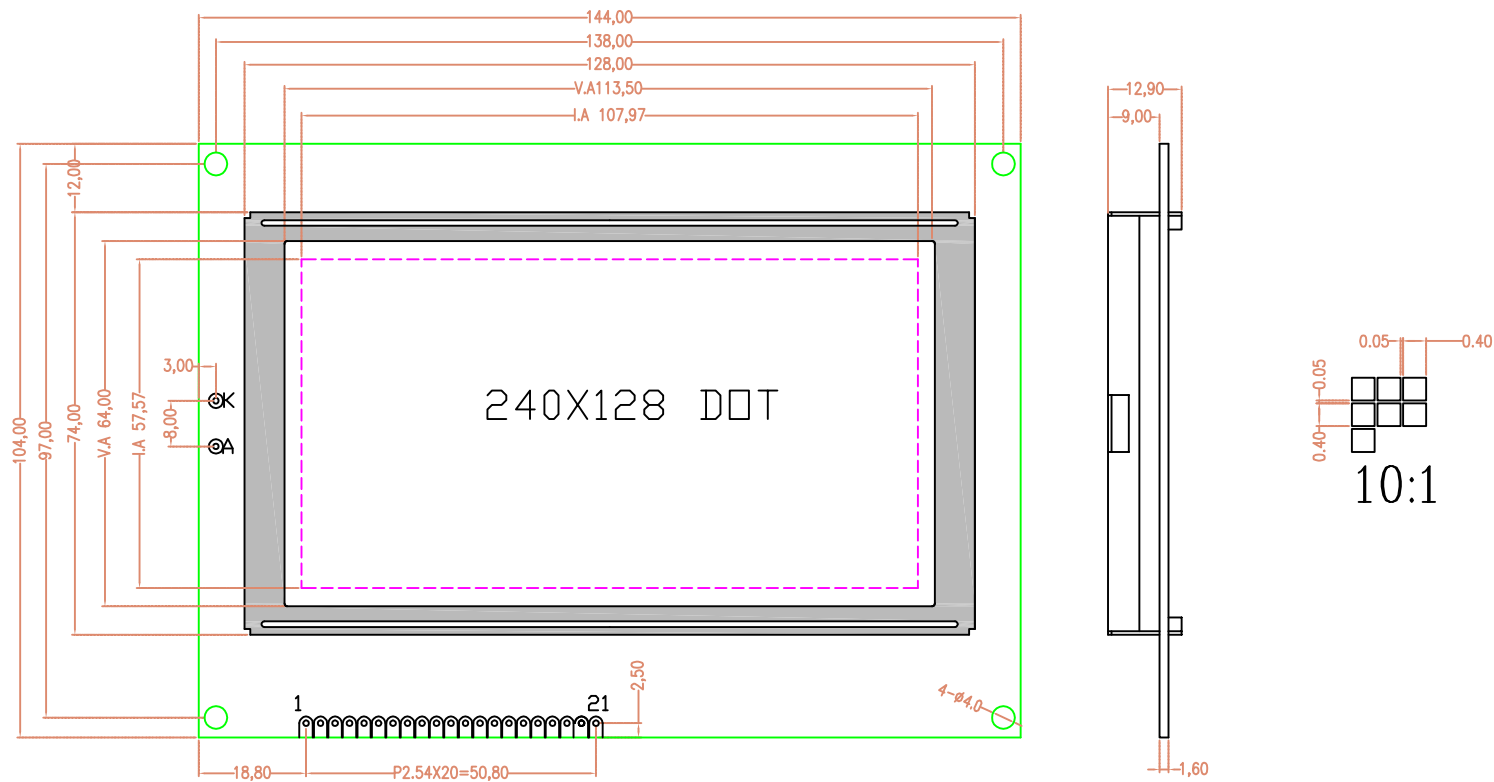

PIN	1	2	3	4	5	6	7	8	9	10	11
SIGNAL	FG	VSS	VDD	V0	WR	RD	CE	C/D	RES	DB0	DB1
PIN	12	13	14	15	16	17	18	19	20	21	
SIGNAL	DB2	DB3	DB4	DB5	DB6	DB7	FS	A	K	VOUT	

		序号	修改记录		厦门胜创光电有限公司 XIAMEN SYSTRONIC OPTICS CO.,LTD		
		1	初版		DRAWN BY: CHECKED BY: APPROVED BY: CONFIRMED BY:	DOC. : SCM240128A DWG NO: SCM240128A DATE: 2005.06.18	 SCALE: UNIT: mm SHEET NO: 1 OF 1
<b>PERFORMANCE FEATURES</b>							
LC FLUID:		STN		DRAWN BY:		DOC. : SCM240128A	 SCALE: UNIT: mm
SUPPLY VOLTAGE:		VDD=5.0V		CHECKED BY:		DWG NO: SCM240128A	
POLARIZER:		TRANSMISSION/NEGATIVE		APPROVED BY:		DATE: 2005.06.18	SHEET NO: 1 OF 1
VIEWING ANGLE:		6:00		CONFIRMED BY:			
COLOR:		BLUE					
BACKLIGHT:		LED					
TEMPERATURE RANGE:		-20°C TO 70°C					